

Fig. 1


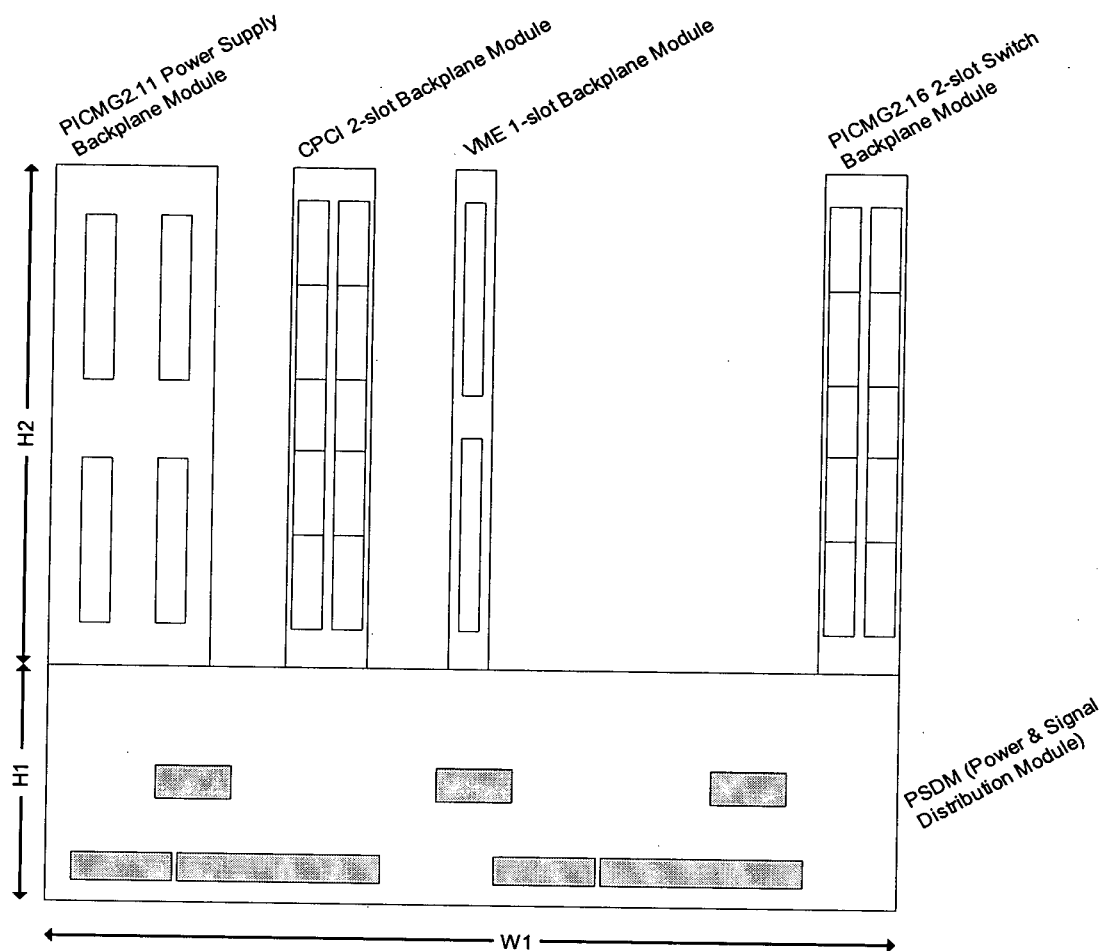


Fig. 2

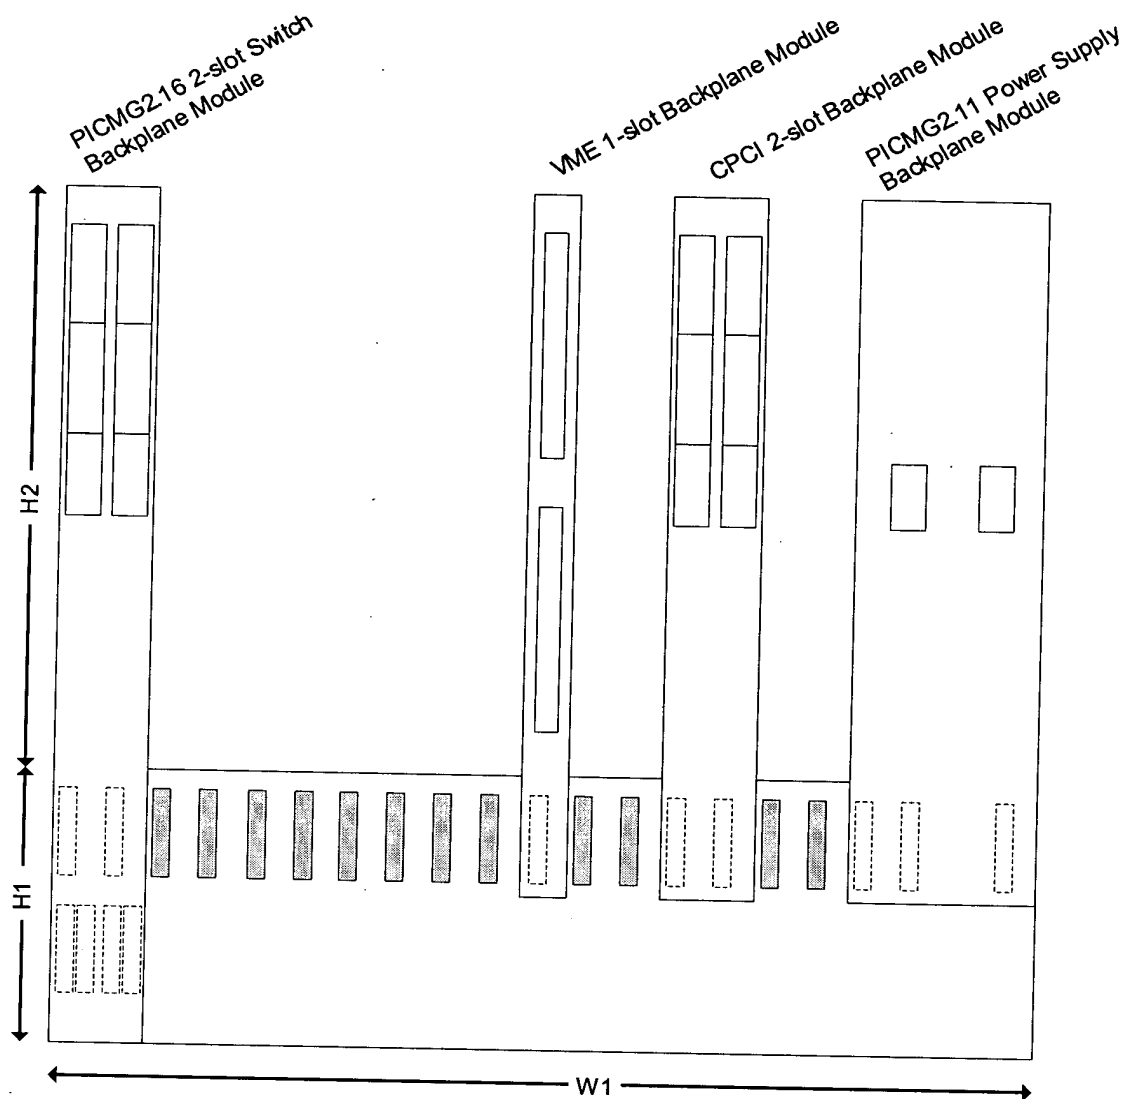

H1: Height required for the PSDB (may vary between different implementations).

H2: Height determined by the type of plug-in board targeted by the system (may vary).

W1: Total width dependent from the number of slots and the pitch of a slot.

■ High density connector for power and signals from PSDM to ABM.

□ Connector hidden by ABM.

Fig. 3

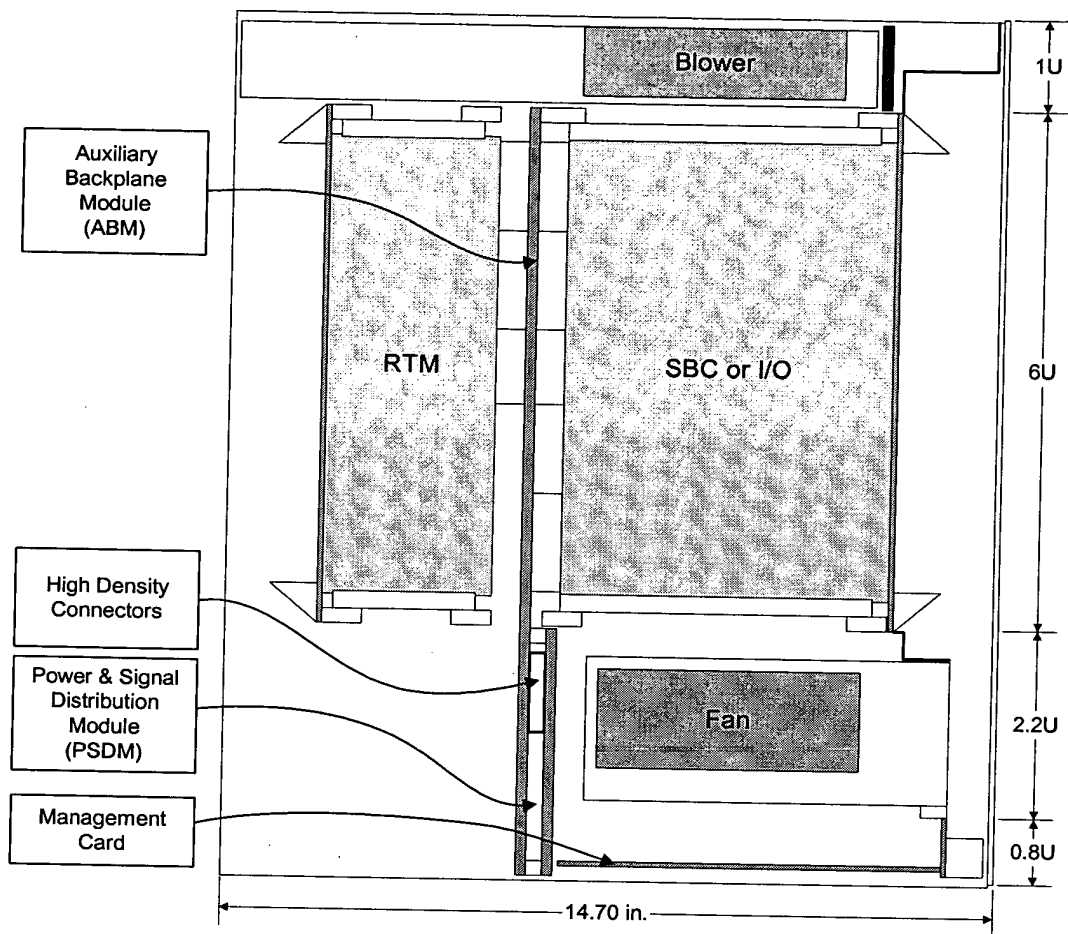


Fig. 4

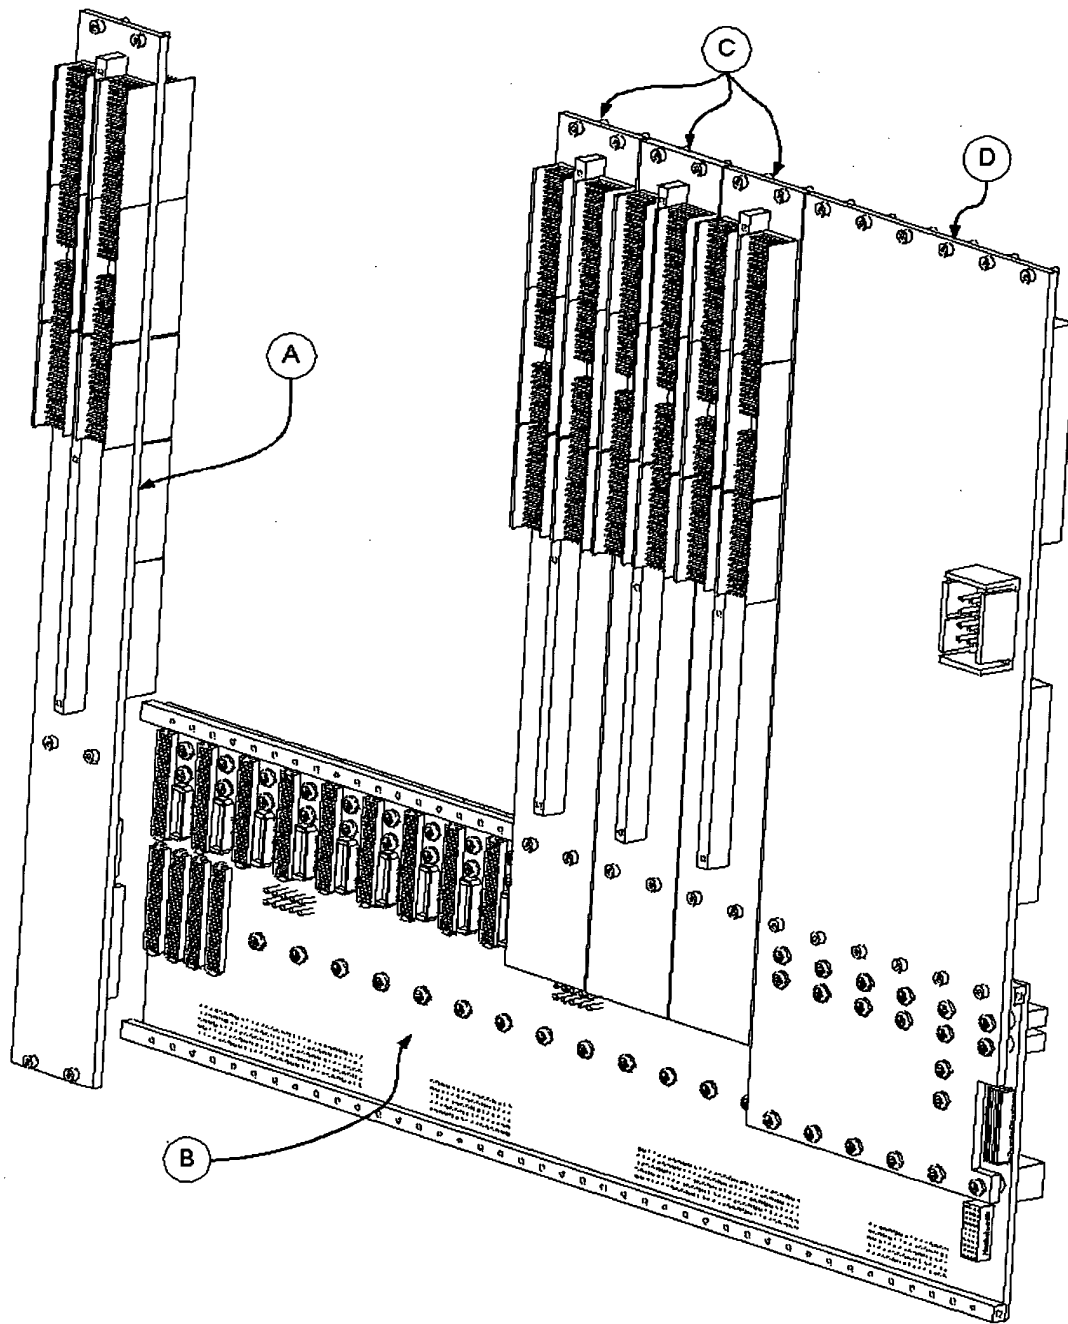


Fig. 5